

汽车保险杠/塑料托盘打包机

Car Bumper/Plastic Pallet Baler


机器应用

专门用于汽车保险杠，塑料托盘等类似产品的压缩打包。


Usage

Specially designed for compressing rigid plastics like car bumpers, plastic pallets etc.

Diagram (Model XTY-1500LB125110)

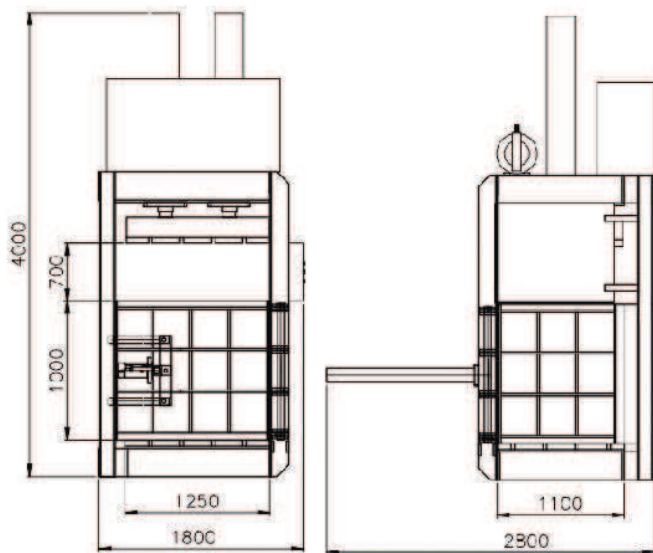

Bale Size (Model XTY-1500LB125110)

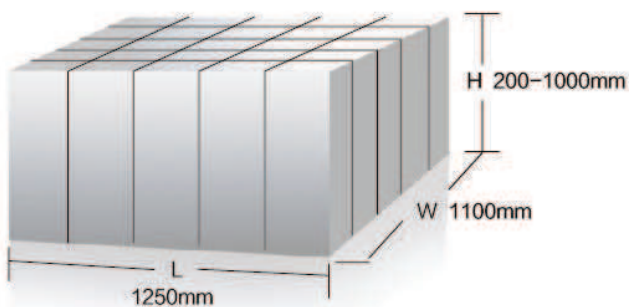

参数 Specifications

型号	XTY-1500LB125110	XTY-2000LB125110
压力 Pressure	150tons	200tons
加料口尺寸 (L*H) Feed Opening Size (L*H)	1250*700mm	1250*700mm
压缩腔高度 Baling Chamber Height	1700mm	1700mm
包块尺寸 (L*W*H, H可调) Bale Size (L*W*H, H is adjustable)	1250*1100*(200-1000)mm	1250*1100*(200-1000)mm
包块重量 Bale Weight	200-500kgs	250-600kgs
功率 Power	18.5kw	22kw
机器重量 Machine Weight	6000kgs	8000kgs
机器外观尺寸 Machine Overall Dimension	1700*2800*4000mm	1800*3000*4200mm

机器特点

- 液压缸自动出包，提高了工作效率
- 大容量压缩腔，方便操作者投入较大尺寸物料
- 采用开门停机设计，使机器更安全可靠
- 装配急停按钮，单独安装，位置醒目，使操作更安全
- 直角开门，方便#字捆包
- 装配自动平衡装置，避免因放置物料不当产生意外
- 采用日本进口NOK密封圈，使用寿命更长
- 采用日本A.M.C油管接头，确保不漏油
- 独特的电机和泵的直叉连接，保证泵和电机100%同心，替代了一般的联轴器联结方式，提高了泵的使用寿命

Features

- Automatic hydraulic cylinder bale ejector for quickly and easily ejecting the bales out from the machine
- Large volume of compressing chamber for receiving large size materials
- The ram will stop running downwards when the feeding gate is opened which ensure the safety of the operation
- Equipped with independent emergency stop for safe operation
- Equipped with right-angle opening door design, convenient for ‘#’ tying
- Special ram guides design makes the platen not slope because of uneven materials feedings during compression
- Equipped with NOK seals that from Japan means longer lifespan of the seals
- Equipped with A.M.C. oil pipe joints that from Japan ensures the machine far away from oil leakage problems
- Peculiar combination of motor and pump with direct-crossed connection makes sure 100 percent concentricity, which replacing the common coupling connection so that extend the lifespan of the pump