

中型全自动打包机

Medium-sized Full Automatic Balers

机器应用


专门用于废纸、废旧纸板，纸箱厂边角料，塑料膜，秸秆等松散物的压缩打包。

Usage

Widely used for compressing waste cardboards, cartons, paper, plastic film, straw etc.



Bale Size (Model XTY-600W11075-30)

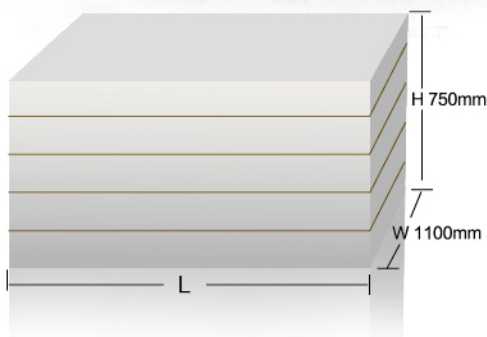

机器特点

- 光电开关自动检测物料是否加满，实现全自动功能
- 合理的双剪式刀片设计，提高了切纸效率，延长刀片的使用寿命
- 独特的防滑落设计，避免梯形包的出现，使包块更美观
- 主油缸采用炮耳支架及球端面设计，可消除作用在主轴上的扭矩，显著延长油封寿命
- 装配独特的捆线装置，从而减低故障率并便于清洁保养及维修
- 采用差动技术，使打包速度更快，从而提高工作效率，节省功率
- 机器出口处四方向浮动缩口，从而自动分配四面的压力，可广泛用于各种不同物质的压缩
- 可自由设定出包长度，准确记录打包数值，方便操作者使用
- 故障自动诊断，自动显示，提高检测效率
- 国际标准的电路布置、图示化操作指示以及详细的部件标示，使操作者简单易懂并提高维护效率
- 压车经过龙门铣床加工，确保运动时的精度
- 本机采用原装台湾进口液压系统，使机器更安全耐用
- 无需特殊的场地基础设施，使安装简单容易

Features

- Photoelectric switch activates baler when charge box is full
- Unique double-cutting design of cutters improves the cutting efficiency and lengthens the lifespan of the cutters
- Particular anti-slide design of the machine makes nicer bales
- Unique trunnion-mounted frame and ball-end joint design for the main cylinder avoid the torque on the rod, which lengthens the lifespan of the seals
- Equipped with rapid automatic tying system, easy for cleaning and maintaining
- Use differential technique for the hydraulic system, makes shorter cycle time so that improve the working efficiency and save electricity
- Automatic tension system ensures “brick-like” bales on all loose materials.
- Adjustable bales length and bales quantity accumulating function make the operation of the machine more convenient
- Automatically detect and show the errors of the machine which improve the machine inspection efficiency
- International standard electric circuit layout, graphic operation instruction and detailed parts marks make the operation been more easily understanding and improves the maintenance efficiency
- The press heads are specially processed by planomiller, ensures the precise running of the ram
- Use high quality hydraulic system from Taiwan, ensures the stable running of the machine
- The heavy duty machine body makes sure only flat ground is required by the installation

参数 Specifications

| 型号 Model | XTY-600W11075-30 | XTY-800W11075-50 |
|---|---------------------------|---------------------------|
| 压力 Pressure | 60tons | 80tons |
| 主电机功率 Main Motor Power | 22kw | 37.5kw |
| 冷却方式 Cooling System | air cooler / water cooler | air cooler / water cooler |
| 循环时间 (空载) Cycle Time (unload) | 24s | 16s |
| 油箱尺寸 Oil Reservoir | 1000L | 1100L |
| 捆包道数 Number of Belting | 4lines | 4lines |
| 捆包铁丝规格 Wire Size | Ø2.7-3.0 | Ø2.7-3.0 |
| 加料口尺寸 (L*W) Feed Opening Size (L*W) | 1600*1050mm | 1600*1050mm |
| 压缩腔尺寸 (L*W*H) Chamber Size (L*W*H) | 2100*1100*750mm | 2100*1100*750mm |
| 包块尺寸 (L*W*H, L可调) Bale Size (L*W*H, L can be adjustable) | L*1100*750mm | L*1100*750mm |
| 打包密度 (OCC) Bale Density (OCC) | 400-500kgs/m3 | 420-500kgs/m3 |
| 产量 (30-60kgs/m3) Throughput (30-60kgs/m3) | 3-7tons/h | 4-8tons/h |
| 机器重量 Machine Weight | 13tons | 14tons |
| 机器外观尺寸 Machine Overall Dimension | 7950*3950*3500mm | 8100*3900*3500mm |
| 送料装置 Feeding Device | Conveyor | Conveyor |

传输机 Conveyor

| | | |
|---------------------------|------------------|------------------|
| 有效宽度 Feeding Width | 1600mm | 1600mm |
| 速度 Speed | 12m/min | 12m/min |
| 功率 Power | 4/5.5kw | 4/5.5kw |
| 重量 Weight | 5tons | 5tons |
| 外观尺寸 Overall Dimension | 9000*2100*4500mm | 9000*2100*4500mm |

中型全自动打包机

Middle-sized Full Automatic Balers

